




Problem # 1:


- Consider the system of two degree-of-freedom shown where the first and the second stories are rigid plates having a mass of  $2M_o$  and  $M_o$ , respectively. The first story is connected by two springs to the fixed supports. (a) Write down equations of motion by considering the free body diagram of the two story masses separately. (b) Evaluate the mass matrix  $\mathbf{m}$ , and the rigidity matrix  $\mathbf{k}$  and the load vector  $\mathbf{p}$ . (c) Determine the circular frequencies  $\omega_i$  and the periods  $T_i$  of the free vibration in terms of  $EI$ ,  $M_o$  and  $\ell$ . (d) Obtain the corresponding two mode shapes  $\phi_i$  and give their graphical representation ( $i=1,2$ ). (e) Check the orthogonality of the modes with respect to the mass matrix and the stiffness matrix  $\phi_1^T \mathbf{m} \phi_2$ , and  $\phi_1^T \mathbf{k} \phi_2$ . (f) Evaluate the generalized masses and stiffness  $M_i = \phi_i^T \mathbf{m} \phi_i$  and  $K_i = \phi_i^T \mathbf{k} \phi_i$  and assess the relationship  $\omega_i^2 = K_i / M_i$  ( $i=1,2$ ). Determine the effective modal masses  $M_1^*$  and  $M_2^*$ , and assess  $M_1^* + M_2^* = 3M_o$ .
- The heights of the stories are  $\ell = 3\text{meter}$ , the columns with a bending rigidity  $EI$  have cross section of  $b/h = 0.30\text{m}/0.60\text{m}$ , the first period of the system is  $T_1 = 0.20\text{s}$  and  $E = 30\text{GPa}$ . Find the numerical values the parameter  $M_o$  and the second period  $T_2$  of the system.
- Evaluate the base shear forces  $V_{b1}$  and  $V_{b2}$  corresponding to the two mode shapes, the equivalent forces applied to the system at the story levels for both cases and the story shear forces by using the acceleration spectrum given. Obtain the shear forces and the bending moments at the columns by using the SRSS combination rule.

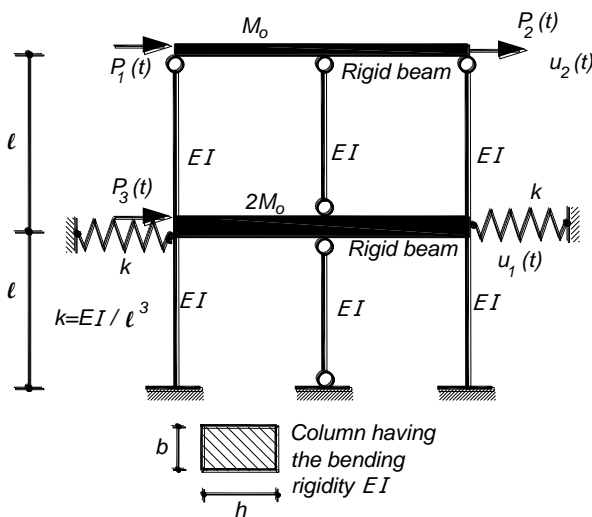

Problem # 1

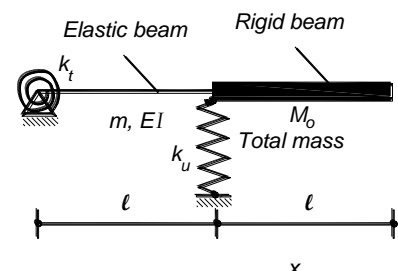

Problem # 2



Problem # 2:

Consider the continuous elastic beam having a cross sectional bending rigidity having  $EI$  and a mass per unit length  $m$  and a length  $\ell$ . The left end of the elastic beam is simply supported having a rotational spring with a spring constant  $k_t$  and its right end is connected to a rigid beam having a total mass  $M_o$ . The right end of the rigid beam is supported by a spring having a spring constant  $k_u$ . Write down the boundary conditions for the free vibration of the system. Obtain the frequency determinant in terms of  $\beta^4 = m \ell^4 \omega^2 / (EI)$  by assuming  $M_o = 3m \ell$ ,  $k_u = 2EI / \ell^3$ . and  $k_t = EI / \ell$ .

$$\mathbf{m} \ddot{\mathbf{u}}(t) + \mathbf{k} \mathbf{u}(t) = \mathbf{p}(t) \quad \mathbf{u}(t) = [u_1(t) \quad u_2(t)]^T \quad \mathbf{p}(t)^T = [P_1(t) \quad P_2(t)] \quad \omega_i = 2 \pi / T_i$$

$$(\mathbf{k} - \omega_i^2 \mathbf{m}) \phi_i = 0 \quad (\mathbf{I} - \omega_i^2 \mathbf{d} \mathbf{m}) \phi_i = 0 \quad |\mathbf{k} - \omega_i^2 \mathbf{m}| = 0 \quad |\mathbf{I} - \omega_i^2 \mathbf{d} \mathbf{m}| = 0 \quad M_i = \phi_i^T \mathbf{m} \phi_i$$

$$K_i = \phi_i^T \mathbf{k} \phi_i \quad M_i \ddot{Y}_i(t) + K_i Y_i(t) = \phi_i^T \mathbf{p}(t) \quad Y_i(t) = \sum_{i=1}^2 \phi_i^T \mathbf{m} \mathbf{v} / M_i \quad k = \frac{3EI}{h^3} \quad k = \frac{12EI}{h^3}$$

$$Y_i(t) = \frac{\sin \omega_i t}{M_i \omega_i} \left[ \phi_i^T \int_0^{t_0} \mathbf{p}(\tau) d\tau \right] \quad L_i = \phi_i^T \mathbf{m} \mathbf{1} \quad \Gamma_i = L_i / M_i \quad M_i^* = \Gamma_i L_i \quad \mathbf{1} = [1 \quad 1]^T \quad V_{bj} = M_j^* S_a(T_j)$$

$$u(x,t) = \sum \phi_i(x) Y_i(t) \quad \ddot{Y}_i(t) + \omega_i^2 Y_i(t) = 0 \quad M(x,t) = -EI \frac{\partial^2 u}{\partial x^2} \quad V(x,t) = -EI \frac{\partial^3 u}{\partial x^3} \quad f_{nj} = V_{bj} \frac{m_n \phi_{nj}}{\sum_k m_k \phi_{kj}}$$

$$\phi(x) = A_1 \sin ax + A_2 \cos ax + A_3 \sinh ax + A_4 \cosh ax \quad a^4 = \frac{m \omega^2}{EI}$$