

5

Operator Overloading

Operator Overloading

- ▶ It is possible to overload the built-in C++ operators such as `+`, `>=`, and `++` so that they invoke different functions, depending on their operands.
- ▶ `a+b` will call one function if `a` and `b` are integers, but will call a different function if `a` and `b` are objects of a class.
- ▶ Operator overloading makes your program **easier** to write and to understand.
- ▶ Overloading does not actually add any capabilities to C++. Everything you can do with an overloaded operator you can also do with a function.
- ▶ However, overloaded operators make your programs easier to write, read, and maintain.

Operator Overloading

- ▶ Operator overloading is only another way of calling a function.
- ▶ You have no reason to overload an operator except if it will make the code involving your class easier to write and especially easier to read.
- ▶ Remember that code is read much more than it is written

Limitations

- ▶ You can't overload operators that don't already exist in C++. You can overload only the built-in operators.
- ▶ You can not overload the following operators
 -
 - *
 - >
 - ,
 - ::
 - ?:
 - sizeof**

Limitations

- ▶ The C++ operators can be divided roughly into binary and unary. Binary operators take two arguments. Examples are $a+b$, $a-b$, a/b , and so on. Unary operators take only one argument: $-a$, $++a$, $a--$.
- ▶ If a built-in operator is binary, then all overloads of it remain binary. It is also true for unary operators.
- ▶ Operator precedence and syntax (number of arguments) cannot be changed through overloading.
- ▶ All the operators used in expressions that contain only built-in data types cannot be changed. At least one operand must be of a user defined type (class).

Overloading the + operator for ComplexT

/* A class to define complex numbers */

```
class TComplex {
```

```
    float real,img;
```

```
    public:
```

```
        : // Member functions
```

```
        TComplex operator+(TComplex&); // header of operator+  
function
```

```
};
```

/* The Body of the function for operator + */

```
TComplex TComplex::operator+(TComplex& z) {
```

```
    TComplex result;
```

```
    result.real = real + z.real;
```

```
    result.img = img + z.img;
```

```
    return result;
```

```
}
```

```
int main() {
```

```
    TComplex z1,z2,z3;
```

```
    : // Other operations
```

```
    z3=z1+z2; like z3 = z1.operator+(z2);
```

```
}
```

Overloading the Assignment Operator (=)

- ▶ Because assigning an object to another object of the same type is an activity most people expect to be possible, the compiler will automatically create a `type::operator=(const type &)` if you don't make one.
- ▶ The behavior of this operator is member wise assignment. It assigns (copies) each member of an object to members of another object. (Shallow Copy)
- ▶ If this operation is sufficient you don't need to overload the assignment operator. For example, overloading of assignment operator for complex numbers is not necessary.

Overloading the Assignment Operator (=)

```
void ComplexT::operator=(const ComplexT& z)
{
    re = z.re;
    im = z.im;
}
```

- You don't need to write such an assignment operator function, because the operator provided by the compiler does the same thing.


Overloading the Assignment Operator (=)

- ▶ In general, you don't want to let the compiler do this for you.
- ▶ With classes of any sophistication (especially if they contain pointers!) you want to explicitly create an operator=.


Example

```
class string {  
    int size;  
    char *contents;  
public:  
    void operator=(const string &); // assignment operator  
    :    // Other methods  
};  
void string::operator=(const string &s)  
{  
    size = s.size;  
    delete []contents;  
    contents = new char[size+1];  
    strcpy(contents, s.contents);  
}
```

Operator Provided by the Compiler

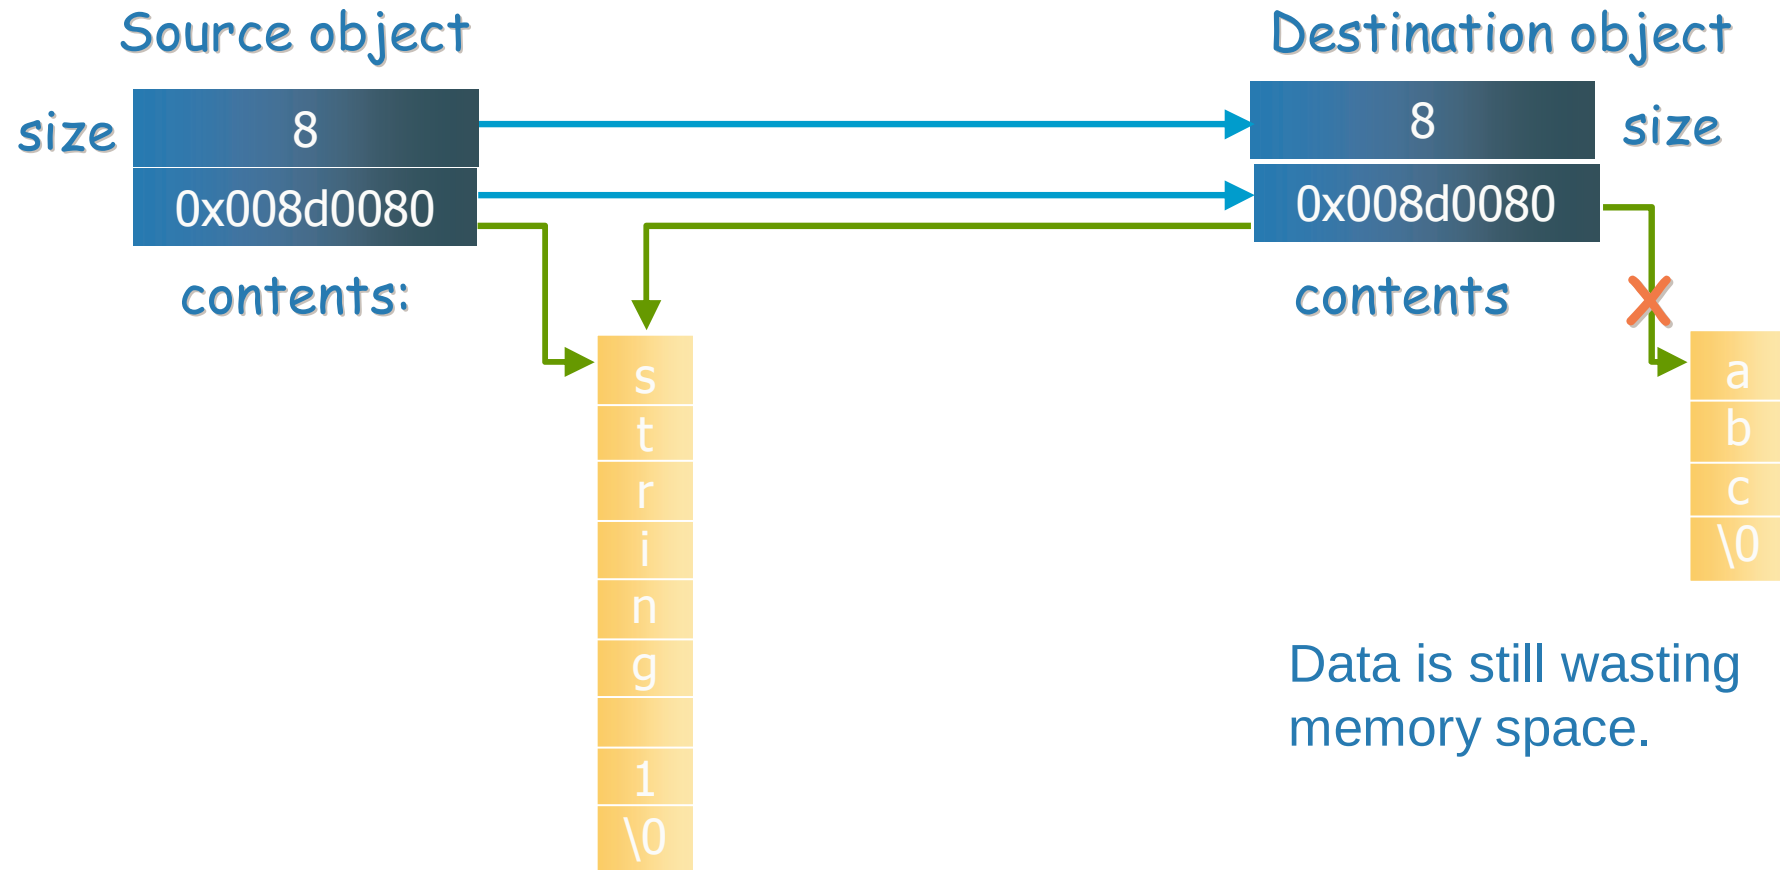

Operator of the Programmer

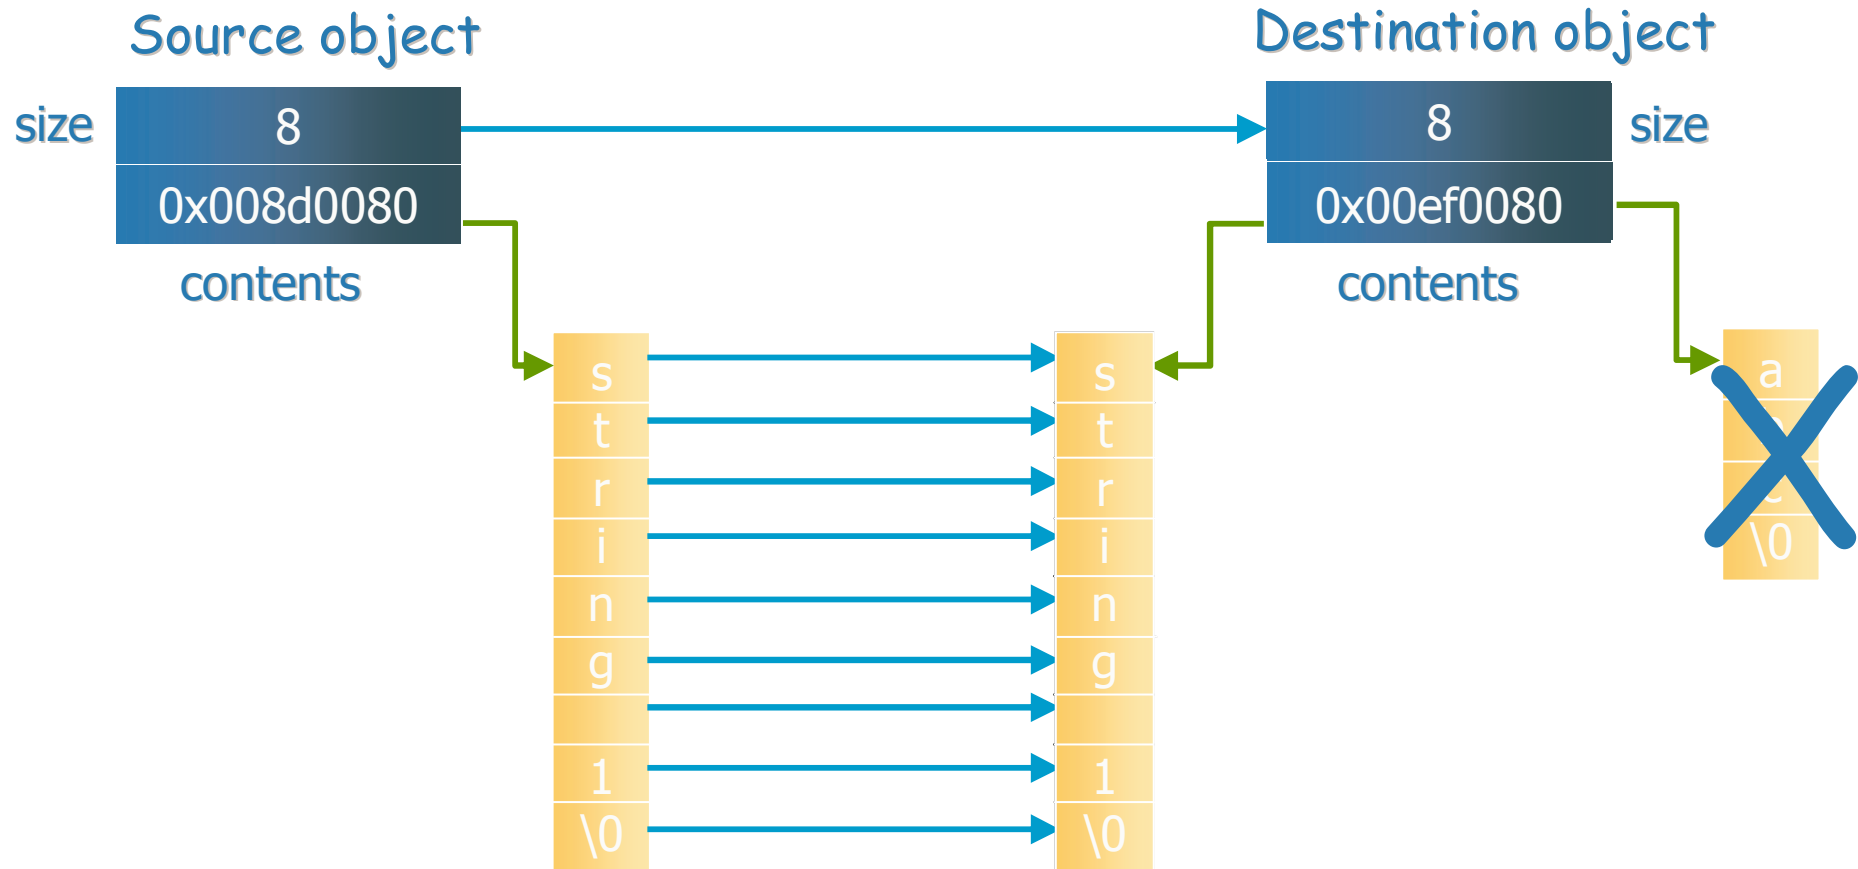

Return value of the assignment operator

- ▶ When there's a void return value, you can't chain the assignment operator (as in `a = b = c`).
- ▶ To fix this, the assignment operator must return a reference to the object that called the operator function (its address).

// Assignment operator , can be chained as in `a = b = c`

```
const String& String::operator=(const String &in_object) {  
    if (size != in_object.size){ // if the sizes of the source and destination  
        size = in_object.size; // objects are different  
        delete [] contents; // The old contents is deleted  
        contents = new char[size+1]; // Memory allocation for the new contents  
    }  
    strcpy(contents, in_object.contents);  
    return *this; // returns a reference to the object  
}
```

Copy Constructor vs. Assignment Operator

- The difference between the assignment operator and the copy constructor is that the copy constructor actually creates a new object before copying data from another object into it, whereas the assignment operator copies data into an already existing object.

Overloading Unary Operators

- ▶ Unary operators operate on a single operand. Examples are the increment (++) and decrement (--) operators; the unary minus, as in -5; and the logical not (!) operator.
- ▶ Unary operators take no arguments, they operate on the object for which they were called. Normally, this operator appears on the left side of the object, as in !obj, -obj, and ++obj.

Example: We define ++ operator for class ComplexT to increment the real part of the complex number by 0.1 .

```
int main() {  
    ComplexT z(1.2, 0.5);  
    ++z; // operator++ function is called  
    z.print();  
    return 0;  
}
```

```
void ComplexT::operator++() {  
    re=re+0.1;  
}
```

► To be able to assign the incremented value to a new object, the operator function must return a reference to the object.

```
// ++ operator
// increments the real part of a complex number by 0.1
const ComplexT & ComplexT::operator++() {
    re=re+0.1;
    return *this;
}
int main() {
    ComplexT z1(1.2, 0.5), z2;
    z2 = ++z1; // ++ operator is called, incremented value is assigned to z2
    z2.print();
    return 0;
}
```

Overloading the “[]” Operator

- ▶ Same rules apply to all operators. So we don't need to discuss each operator. However, we will examine some interesting operators.
- ▶ One of the interesting operators is the subscript operator.
- ▶ It can be declared in two different ways:

```
class C {  
    returntype & operator [] (paramtype);  
    or  
    const returntype & operator [] (paramtype) const;  
};
```

Overloading the “[]” Operator

► The first declaration can be used when the overloaded subscript operator modifies the object. The second declaration is used with a const object; in this case, the overloaded subscript operator can access but not modify the object.

If **c** is an object of class C, the expression

c[i]

is interpreted as

c.operator[](i)

► Example: Overloading of the subscript operator for the String class. The operator will be used to access the **ith** character of the string. If **i** is less than zero then the first character and if **i** is greater than the **size** of the string the last character will be accessed.

```
// Subscript operator
char & String::operator[](int i) {
    if(i < 0)
        return contents[0];           // return first character
    if(i >= size)
        return contents[size-1];      // return last character
    return contents[i];               // return i th character
}
int main() {
    String s1("String 1");
    s1[1] = 'p'; // modifies an element of the contents
    s1.print();
    cout << " 5 th character of the string s1 is: " << s1[5] << endl;
    return 0;
}
```

Overloading the “()” Operator

The function call operator is unique in that it allows any number of arguments.

```
class C{  
    returntype operator ( ) (paramtypes);  
};
```

If *c* is an object of class *C*, the expression

c(i, j, k) is interpreted as

c.operator()(i, j, k)

Example: The function call operator is overloaded to print complex numbers on the screen. In this example the function call operator does not take any arguments.

```
// The function call operator without any argument, it prints a complex number  
void ComplexT::operator( ) ( ) const {  
    cout << re << " , " << im << endl ;  
}
```

Example: The function call operator is overloaded to copy a part of the contents of a string into a given memory location. In this example the function call operator takes two arguments: the address of the destination memory and the numbers of characters to copy.

```
// The function call operator with two arguments
void String::operator( )( char * dest, int num) const {
    if (num > size) num=size;      // if num is greater the size of the string
    for (int k=0; k < num; k++) dest[k]=contents[k];
}

int main( ) {
    String s1("Example Program");
    char * c = new char[8];        // Destination memory
    s1(c,7);                     // First 7 letters of string1 are copied into c
    c[7] = '\0';                  // End of string (null) character
    cout << c;
    delete [] c;
    return 0;
}
```

"Pre" and "post" form of operators ++ and --

► Recall that ++ and -- operators come in “pre” and “post” form.

► If these operators are used with an assignment statement than different forms has different meanings.

```
z2= ++ z1;    // preincrement
```

```
z2 = z1++;    // postincrement
```

► The declaration, **operator ++ ()** with no parameters overloads the **preincrement** operator.

► The declaration, **operator ++ (int)** with a single int parameter overloads the **postincrement** operator. Here, the int parameter serves to distinguish the postincrement form from the preincrement form. This parameter is not used.

Post-Increment Operator

// postincrement operator

```
ComplexT ComplexT::operator++(int) {  
    ComplexT temp;  
    temp = *this;           // old value (original objects)  
    re= re + 0.1;           // increment the real part  
    return temp;            // return old value  
}
```